


## Drum Dryer Automatic Trunnion Oiling System



Drum Dryer: Before

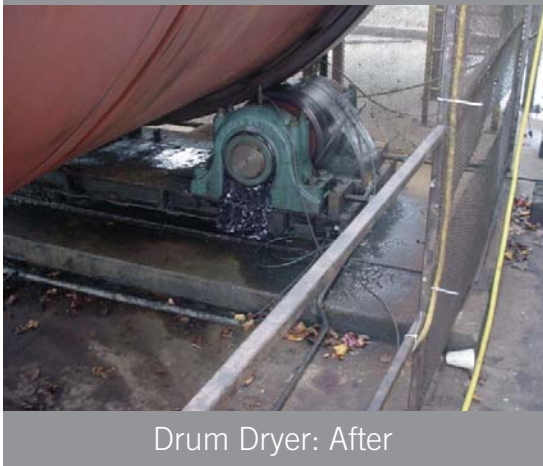

Drum Dryer: After

Trunnion lubrication under drum dryers is traditionally done with a very tacky grease lubricant. When over-lubrication or sling occurs, clean-up becomes time-consuming and unpleasant.

XACT has developed an oil lubrication process and dispensing equipment which:

1. Dramatically reduce amperage draws
2. Reduces cleanliness concerns
3. Improves overall lubrication
4. Reduces trunnion and ring temperatures
5. Reduces lubricant consumption
6. Reduces operational costs



System includes: Logic control cabinet with indication light, stand and timed trigger. Lubricant is pulled from a 55-gallon drum.

### Technical Data:

Part No.	XEAMOLS04N4XTY2
Availability	2 Weeks
Typical Install Time	4 Hours
Number of Lube Points	2 Trunnion Bearings
Lubrication Intervals	Continuously dosing (22DPM)
Recommended Lubes	JAX Magna-Plate 140MV
Power Requirements	110VAC 60 HZ
Air Requirements	60 PSI
Recommended Maintenance	Replace solenoid valve and inspect timer annually