


2-POINT AUTO LUBE SYSTEM Dual Point Lubricator



Left Mount

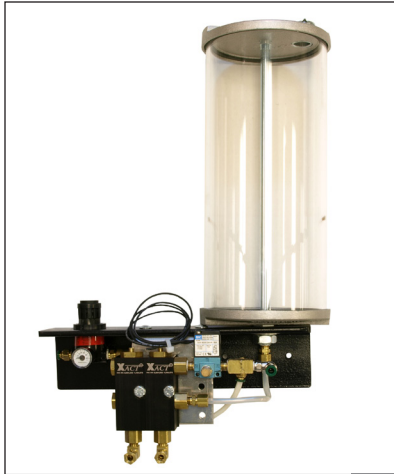

Right Mount

Providing a cost-effective alternative to manual oiling, this dual-point lubricator is self-contained and ensures consistent lubrication using a smaller volume of lubricant. Installation is simplified with included two-bolt bracket and push-to-connect fittings.


List: \$650.00

Accessories/Options:

- Adjustable timer



- Nozzles
(internal mix, brass or stainless steel)

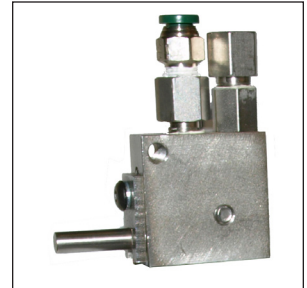

- Flow verification



Technical Data:

Part No.	XEAMOLS02RNBRKT
Availability	2 Weeks
Typical Install Time	1 Hour
Number of Lube Points	2 Lube Points
Lubrication Intervals	Customer Control or Available Timer
Power Requirements	110 VAC
Air Requirements	40 to 125 PSI

Features:

- Clear acrylic reservoir (1 gallon) for visual inspection of the oil level
- Mechanically adjustable positive-displacement pumps
- Field configurable left- or right-hand